

Wadkin



GC 300

THROUGHFEED PLANER AND PLANER MOULDER


- Full 300mm 12" width finished capacity.
- Short infeed table.
- Pneumatically linked driven infeed roller.
- Hydraulically clamped outboard bearings to horizontal spindles.
- Cardan shaft drive to feedworks.



AUTHORISED STOCKISTS
A. L. DALTON LTD
CROSSGATE DRIVE
QUEENS DRIVE IND. ESTATE
NOTTINGHAM NG2 1LW
TELEPHONE: 0602 861445



GC300 THE AFFORDABLE ANSWER TO WIDE CAPACITY PLANING AND MOULDING

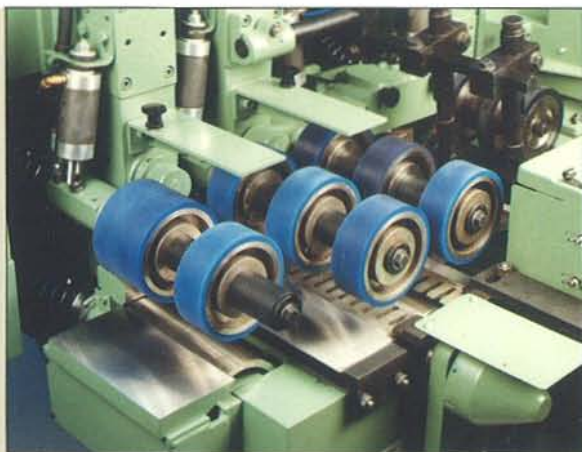

Outfeed Features: 220mm wide outfeed driven bed roller. 50mm staggered side heads. Hydraulically clamped outboard bearings.

Robust and reliable, the Wadkin GC300 has been designed as a cost effective planer moulder, for full 300mm (12") width capacity timber requirements.

Simple to operate, with quick easy setting for different widths and thicknesses utilising mechanical digital readouts as standard, the GC300 is a versatile addition to your operation.

Compact, the GC300 does not waste valuable space, yet can cope easily with long lengths of often bowed and twisted timber.

FEATURES

- 5 heads as standard.
- Full cardan shaft drive, pneumatically loaded feed rollers.



Infeed Features: Infeed driven, pneumatically linked bed roller. Dual, independent top head chipbreaker shoes. Roller side pressures. Multiroller infeed drive.

- Hydraulically clamped out-board bearings to horizontal spindles.
- Powerful 11kW (15 h.p.) motors with star delta starting to all horizontal heads.
- Safety enclosure.
- 50mm staggered side heads for the ultimate in width accuracy.
- Edge referencing to first bottom head.
- Manual bed lubrication.
- Dual independent top head chipbreaker shoes for perfect wide timber control.
- Optional manual Star Delta starting to side heads.

SPECIFICATIONS

● Maximum size of timber admitted	310x130mm.	● Feed motor	3 kW (4 h.p.)
● Maximum size of finished timber	300x120mm.	● Manual Star Delta Starting.	
● Infinitely variable feed speeds	6-20m/min.	● Motors: bottom head	11 kW (15 h.p.)
● Spindle diameter	40mm.	top head	11 kW (15 h.p.)
● Spindle speeds	6000 rpm.	fence side head	5.5 (7.5 h.p.)
● Maximum cut on bottom head	10mm.	near side head	5.5 (7.5 h.p.)
● Maximum cut on fence side head	10mm.	2nd bottom head	11 kW (15 h.p.)

As our policy is to constantly improve design, the details given in the leaflet are not to be regarded as binding.

Certain illustrations show guarding removed for clarity.



Wadkin Leicester

Green Lane Works,
Leicester LE5 4PF
England.
Telephone: 0533 769111
Telex: 34646 Wadkin G
Fax: 0533 742310

A Division of Wadkin plc
Member of The Thomas Robinson Group plc

We know Woodworking!

Leaflet No. 1470/4321
Printed in England.